

# Nebulo

# IGEBA®



Electric motor with 230/240 V, 50/60 Cycles, 700 Watts  
Netweight 3,8 kg  
H x W: 40 x 35 cm  
Solution tank Ø 25 cm  
Tank contents 4 l  
Connection cable, approx. 3 m  
Output infinitely adjustable from 0,3 - 15 l/h  
Other Voltages available upon request



Zertifiziert - Certified  
DIN EN ISO 9001 : 2000


## 9001:2000



quality

characteristics

application



The most important quality features of our „NEBULO“ are:

- manufactured from strong durable resistant thermoplastics
- more powerful electric motor producing greater aerosol volume at higher velocity with deeper penetration
- more uniform droplet spectrum
- droplet size can be regulated by increasing or decreasing the solution flow

Due to these characteristics our „NEBULO“ offers the following advantages:

- highly versatile and the ideal equipment for the application of insecticides, disinfectants, deodorants and even aggressive chemicals
- the range of the fog is deeper than with comparable units
- the range of application includes space and surface treatment
- easy handling and operating the unit

Fields of application, e.g.:

- catering trade
- food industry
- horticulture
- livestock protection
- public services and utilities
- public health
- storage warehouses
- recreation facilities
- transportation
- workplaces and waste disposals
- vaccination of poultry

**IGEBA Geraetebau GmbH**

P.O. Box 6  
D-87478 Weitnau/Germany

[0]8375/9200-0

[0]8375/9200-22

Telex 54 729 igeba d

info@t-online.de

www.igeba.de

# Neburotor

# IGEBA®




- Electric motor with 230/240 V, 50/60 Cycles, 700 Watts
- Netweight 3,8 kg
- H x W: 40 x 35 cm
- Solution tank Ø 25 cm
- Tank contents 4 l
- Connection cable, approx. 3 m
- Output infinitely adjustable from 0,3 - 15 l/h
- Automatically rotation between 90° and 360°
- Other Voltages available upon request

The **NEBUROTOR** can also be fitted to the wall, by means of a wall support. If set to a rotation of 180°, the reach of the spray can be doubled. As a further accessory, we also offer a „timer“, with which you can programme the device to automatic spraying!



output

The **NEBUROTOR** is fitted with an infinitely adjustable through flow meter. This makes an output between 5 and maximum 250 ml/min (0.3-15l/h) possible. Even with the largest output, the droplet size is still under 30 µ.

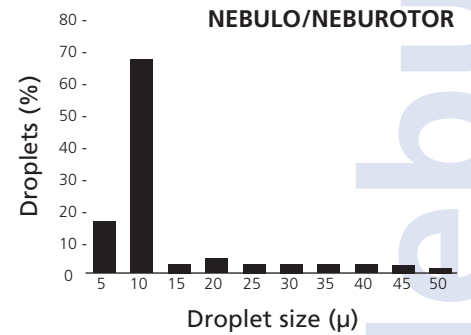

The **NEBUROTOR** is the result of consistent further development in order to facilitate operation and handling. The device is technically equipped just like the NEBULO. However, the **NEBUROTOR** is fitted on a panel, through which the device can automatically rotate between at least 90° and 360°.



Zertifiziert - Certified  
DIN EN ISO 9001 : 2000

## 9001:2000

**IGEBA Geraetebau GmbH**  
P.O. Box 6  
D-87478 Weitnau/Germany  
☎ [0]8375/9200-0  
☎ [0]8375/9200-22  
Telex 54 729 igeba d

info@t-online.de  
www.igeba.de